






Air Operated Tow Pins

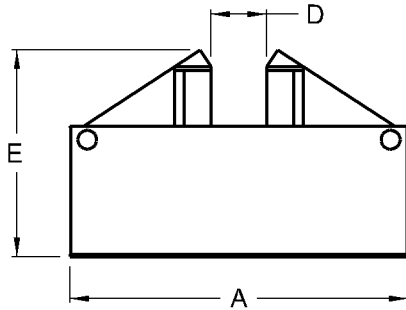

Model Number	Units of Measure	Maximum Wire Size	Pin Dia.	Pin Height	A	B	C	D	E
8T214-A	Inches	2	8	14	88	27.5	34	14.5	54
	MM	51	203	356	2235	699	864	3681	372
12T216-A	Inches	2 1/4	12	16	96	33	34	14.5	56
	MM	57	305	406	2438	838	864	368	1422

Standard Features

- Designed for breaking strength of wire with 45° wrap on tow pin roller
- Available in bulwark or flush mounted styles
- Tow pins raised / lowered with pneumatic actuators
- Grease lubricated bronze bearings
- Economical installation and set up
- Smith Berger Quality

Optional Features

- Custom sizes
- Integral stern rollers
- Paint to your specification
- Third party certification

*We will custom engineer any of our products to suit **YOUR** requirements!*

7915 10th Ave. S., Seattle, WA 98108 USA - Tel: 206-764-4650 - Fax: 206-764-4653 - Website: www.SmithBerger.com